


CLIMATISEUR MURAL INVERTER

12000 BTU

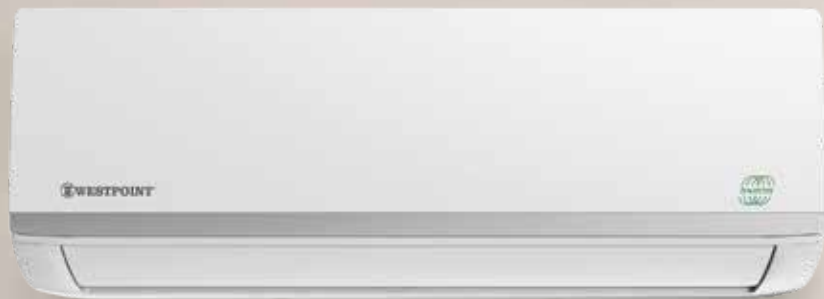


TROPICAL

Température extérieure 50°C



Jusqu'à 50% d'économie d'énergie



Super silencieux



Wi-Fi


Module WIFI



Kit de stérilisation UV

EN OPTION



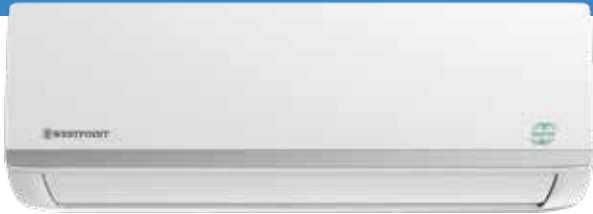

économie d'énergie



Filtre multi-fonctions



Auto balayage



Froid rapide



Chauffage rapide



Ventilation confort



Mode Silence



Ecran LED

PERFORMANCES			
Cooling capacity		(Btu) (W)	12000 3470
Heating capacity		(Btu) (W)	12300 3600
STANDARD CONDITIONS			
Input power cooling		(W)	531
Input power heating		(W)	561
Running current cooling		(A)	2.9
Running current heating		(A)	3.2
Air flow	high auto medium	(m ³ /h) (m ³ /h) (m ³ /h)	571 445 382
Remote control			YES
Inverter			YES
Gas refrigerant			R410a
Charge		(g)	750
E.E.R.		(W/W)	3.51
Voltage		IDU (V-Ph) ODU (V-Ph)	220-240 V - 1 PH 220-240 V - 1 PH
Frequency		(Hz)	50 Hz
FEATURES			
Indoor unit			
Net dimensions	height width depth	(mm) (mm) (mm)	295 802 200
Gross dimensions	height width depth	(mm) (mm) (mm)	380 875 285
Net weight		(kg)	9.0
Gross weight		(kg)	11.4
Sound pressure	high medium low	(dB(A)) (dB(A)) (dB(A))	38.5 33.0 27.0
Excessive operating pressure	discharge suction	(MPa) (MPa)	4.2 1.5
Max current		(A)	9.0
Max power input		(W)	2000
Outdoor unit			
Net dimensions	height width depth	(mm) (mm) (mm)	555 765 303
Gross dimensions	height width depth	(mm) (mm) (mm)	610 887 337
Net weight		(kg)	24.0
Gross weight		(kg)	27.2
Air flow		(m ³ /h)	2100
Noise level		(dB(A))	54.0
Max current		(A)	9.0
Max power input		(W)	2000
Compressor type			ROTARY
Compressor brand			GMCC
Compressor model			KSK103D33UEZ3
Connection pipe	mini length allowed maxi length allowed maxi height allowed diameter liquid gas connexion	(m) (m) (m) (mm) (inch) (mm) (inch)	3 20 10 6.35 / 1/4 " 12.7 / 1/2"
OPTIONS			
LED display			YES
Timer		(h)	24